


Easyjet Series Double Heads Printer



- Original Epson Head
- Width: 1600/1820mm

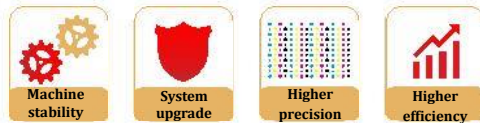

Epson original print head printing speed

Print head \ Speed	Sketch mode	Production mode	Quality mode
F1440-A1	29.8m ² /h	22m ² /h	15.8m ² /h
F1080-A1	31.6m ² /h	22.7m ² /h	17.5m ² /h
I3200-A1/E1	42m ² /h	27m ² /h	21.4m ² /h

Variable ink drop & gray level printing to achieve fine image quality

- Eject 3 kinds of variable ink droplets of different sizes, and the size of the ink droplets are staggered, and the small ink droplets are used as color compensation to enhance the details of the picture;
- Grayscale printing technology can print out more perfect tones, exquisite and smooth gradient effects, tough text lines and complex details without reducing the printing speed.



Intelligent printing and high-quality mechanical design



Anti-collision device

The two sides of the trolley are equipped with anti-collision devices, and printing stops when encountering obstacles, which effectively protects the print head and prolongs the service life;




Automatic paper detection device

The printing platform device has an automatic paper detection device, which automatically detects whether the printing medium is finished printing, and is more intelligent;




Intelligent external heating device

Synchronous external heating device can realize the simultaneous use of hot air and cold air to improve work efficiency;

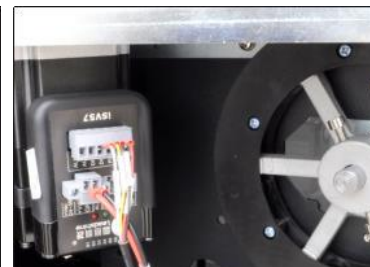

Servo motor

Selected brushless motors, during the operation of the machine, the paper feed is more accurate and the operation is more stable;

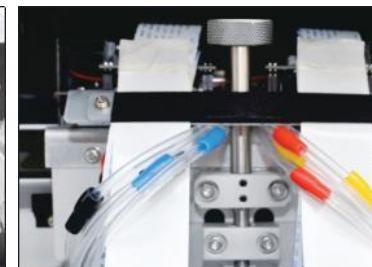

Nozzle height adjustment

The printing cart is equipped with a manual height adjustment device, which makes it easier to adjust the height of the print head from the medium;

Product Specifications

*Specification do as present one, if there is a change without notice.

Model	Easyjet1602	Easyjet1602F	Easyjet1602U	Heating system	Front, middle and back three-stage embedded synchronous heating control system
Printhead type	F1080 -A1	F1440-A1	I3200-A1/E1	External drying	Infrared heating external drying fan
Printhead number	2			Operating language	Chinese/English
Printhead height	2mm-3mm			Operating system	Win10 /Win 7
Cleaning	Fully automatic cleaning			Working environment	Temperature range:18 °C~25 °C; Humidity range: 35%~65% Rh
Print head spray	Anti-blocking flash spray and automatic moisturizing			Print interface	1000M/ Network port printing
Ink type	Eco-solvent ink/water-based ink/water-based sublimation ink			RIP software	Maintop /Photoprint /Wasatch
Ink color	Four-color (C/M/Y/K)			Power parameters	AC-220V ,50Hz /60Hz
Cartridge capacity	1000ml/color			Power (W)	Min: 32W, Max: 2300W
Ink supply	Negative pressure continuous ink supply			Noises	Min<32dB, Max<=65dB
Print effective width	1600 mm			Machine size (LxWxH)	2380mm x 730mm x 1475mm (LxWxH)
Type of medium	Photo paper/adhesive/canvas/rice paper/car sticker/heat transfer paper and other materials			Net weight (Kg)	170 Kg
Loadable coil weight	40 kg (below)			Packing size (LxWxH)	2445mm x 750mm x 625mm (LxWxH)
Paper take up device	Standard			Total weight (Kg)	220 Kg