

# LC-A3 Heat Transfer Printer


Epson original print head:  
F1080-A1 / I3200-A1 two-pack



## Epson original print head printing speed


Print head Speed	F1080	I3200-A1
Sketch mode	18.6m <sup>2</sup> /h	24.9m <sup>2</sup> /h
Production mode	13.4m <sup>2</sup> /h	16.4m <sup>2</sup> /h
Quality model	10.3m <sup>2</sup> /h	13.5m <sup>2</sup> /h

## LC-A3 DTF 2 Heads Printer

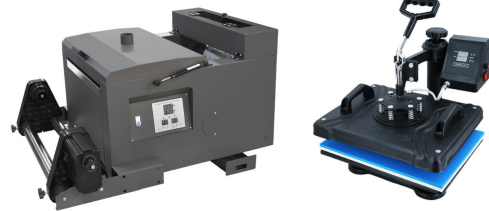

Matching Model-Powder shaking machine + Thermal transfer machine

## Production process

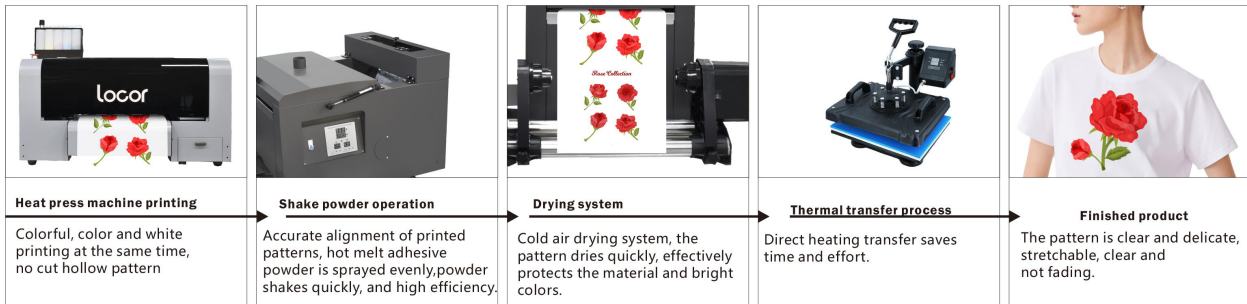

## Product Specifications

\*Specification do as present one, if there is a change without notice.

Model	LC-A3 Heat Transfer Printer			
Print head type	F1080	I3200-A1	Drying system	Shake powder machine drying
Print head number	2pcs	2pcs	Operating language	Chinese/English
Print head height	1.5mm-2.5mm		Operating system	Win10/Win7
Cleaning	Fully automatic cleaning		Working environment	Temperature range:18 °C~25 °C; Humidity range: 35%~65%Rh
Print head spray	Anti-blocking flash spray and automatic moisturizing		Print interface	1000M/ Network port printing
Ink type	Pigment ink		Compatibility	Support LAN printing
Ink color	CMYK+W, Fluorescent color available		RIP software	Maintop /Photoprint/Wasatch
Cartridge capacity	500ml/color		Power parameters	AC-220V ,50Hz /60Hz
Ink supply	Negative pressure continuous ink supply		Power (W)	Standby: 32W, Max: 1200W
Print effective width	300mm		Noises	Standby<32dB, Max<=65dB
Type of medium	Heat transfer PET film		Machine size	1000mm x 680mm x 500mm (L*W*H)
Loadable coil weight	40 kg (below)		Net weight	100 Kg
Heating system	Front, middle and back three-stage embedded synchronous heating control system			